



thimon

The "all in one"

The "all in one" shrink hooding system

COMBI-PAL 2000

working and maintenance ergonomics
absolute safety
high performance
perfect hooding

The ergonomic association of the COVER-PAL 2000 and the HOT-PAL 2000 allows to get an efficient and compact system.



Description

1. Hood preparing module
2. Transfer module
3. Machine frame
4. Hooding module, COVER-PAL 2000
5. Shrink module HOT-PAL 2000

Standard technical datas

- Capacity: 80 pallets/hour and more, according to the application
- Load sections: 1100 x 1300 mm*
- Load heights: de 500 to 2700 mm*
- Weight: around 4900 kg
- Télémécanique or Siemens PLC*
- Installed power: 30kVA
- Supply voltage: 3 x 400 V-50 Hz
- Input/Output control voltage: 24 V CC
- Compressed air pressure: 6 bars


* For any other equipment, dimensions and lay out, please contact us.

Film's characteristics

- Diameter of the reels : 1000 mm
- Weight : 1000 kg
- Film thickness : up to 40 µ

Options

- A rotating film gripping system to avoid the rotation of half pallets.
- Two, three or four reels

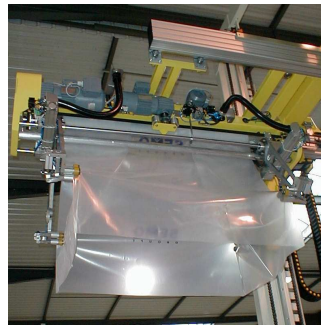


Opening and rotation of the hood for 1/2 and crosswise pallets




Option : Four reels

Lay out of the COMBI-PAL 2000

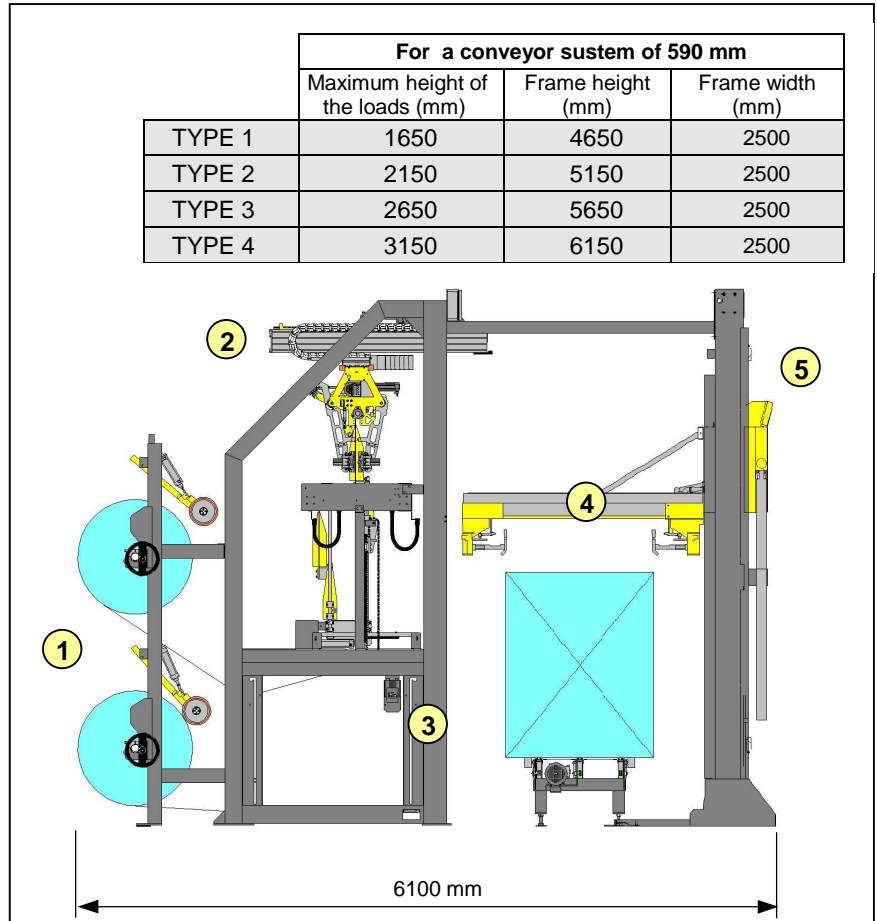

Operating cycles

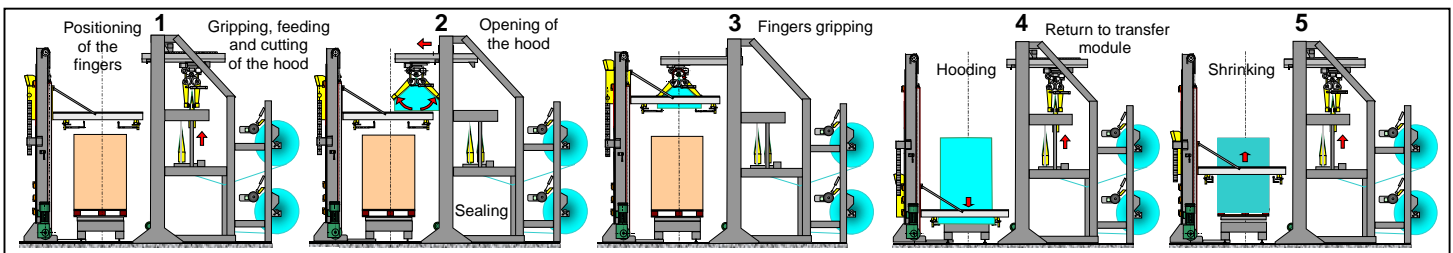

Wrapping systems
with plastic film

Savoie Hexapôle – Rue Louis Armand - BP 69 -
73420 Méry / France
Tel.++33(0)4 79 61 00 44 - Fax++33(0) 4 79 61 71 00
E – mail : thimon@thimon.com
Web site : <http://www.thimon.com>