

GX 1.0

ATECMAA PACKAGING

Automatic cycle stretch wrapping machine

For stretch cast film or pre-stretch film: excellent return on investment

Flexible installation

Reliability/ robustness

Mechanical brake

Easy use

Pre-set automatic cycle


- Simple control pannel: On/off
- Automatic detection of the height of the pallet
- Height of the pallet: up to 2400 mm (standard machine)
- Progressive start of the turntable
- Mechanical brake made up of Ferrodo material
- 5 to 30 pallets/day
- Embedding belt optional
- Weigh integrated scale within the wrapping time: optional

Flexibility of logistics service: 230 V single phase plug in + earth

Any type of CAST stretch films up to 23 μ and pre-stretch films up to 9 μ on available on the market

TECHNOLOGIES ET PROCESS D'EMBALLAGE

32, rue de Charette • 28140 TERMINIERS - FRANCE Tél : 33 (0)2 37 18 58 13 - Fax : 33 (0)2 37 32 11 34 ou 33 (0)2 37 32 14 22 www.rassinouxsa.com - Commercial production : clients@rassinouxsa.com Comptabilité : compta.mf@rassinouxsa.com - Qualité : qualite@rassinouxsa.com







GX 1.0 Automatic cycle stretch wrapping machine

CKAGING		
TECHNICAL FEATURES :	 Installed power: 	1 KW
	- Power:	230V Single Phase 50hz + earth
	- Manufacture:	IP54
<u>Dimensions:</u>	- Length:	2490 mm / 2615 mm
	- Width :	1812 mm / 1937 mm
	- Overall height :	2900 mm
	- Weight:	400 Kg (ou 470 kg*)
Accepted dimensions of the pallets:	- Length :	1200 mm
	- Width:	800 (ou 1200 mm*)
	- Height:	2400 (ou 2900 mm**)
	- Maximum load:	1500 Kg
ASSEMBLED PARTS OF THE MACHINE:		
- Column: Folded sheet metal made	-Maximum pallet +	
	load wrapping height :	2572 mm or 3072 mm**
- Bobbin trail type B.C.B. (Bobbin chuck br	ake)	
 Microswitches for stopping the Easy loading and unloading of Tension strength adjustable by 	the bobbin—width 500 mm	axis
- Lowered turntable, protected by a periph	eral belt	
	- Height : - Diameter:	79 mm 1600 mm (or 1750 mm optional)
Powered by motor-reducer, drive	with 15.8 mm pitch chain	
	- Rotation speed:	12 rev/min
- Electrical equipment: all from CE manufa	acturers	
- IP Level of protection IP 53 (motor-reduc	ters IP 54)	
- Colour: anthracite grey RAL 7016. Yellow	turntable RAL 1018	
- Polymerised epoxy-polyester painting, 80	to 100 microns thick, with anti-co	rrosion treatment
- Optional : * turntable with a dia	meter of 1750 mm.	
** 500 mm heightened	l column.	
*** Weigh integrated so	cale within the wrapping time	
**** Ramp or embedding	g belt	
	32 rue de Charatte • 2	8140 TERMINIERS - FRANCE

TECHNOLOGIES ET PROCESS D'EMBALLAGE

32, rue de Charette • 28140 TERMINIERS - FRANCE Tél : 33 (0)2 37 18 58 13 - Fax : 33 (0)2 37 32 11 34 ou 33 (0)2 37 32 14 22 www.rassinouxsa.com - Commercial production : clients@rassinouxsa.com Comptabilité : compta.mf@rassinouxsa.com - Qualité : qualite@rassinouxsa.com




ΡΑϹΚΑGΙΝG

GX 1.0

Automatic cycle stretch wrapping machine

USE:

- On/Off button to manage an automatic cycle
- Fixed and independant consolidating revolutions at the top and bottom of the pallet
- Automatic detection cell of the height of the pallet

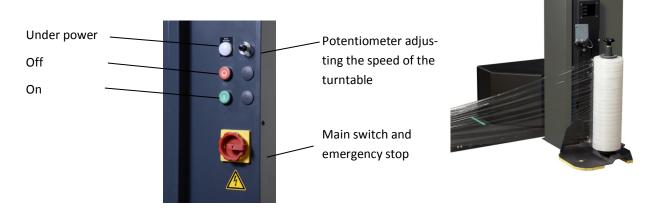

European made machines in compliance with the applicable CE regulations (CE) NON CONTRACTUAL DOCUMENT :

Considering the evolution of the machines, we may change at tany time our products, dimesnions, texts and drawings without any prior notice The complete or partial reproduction without express written permission is prohibited.

TECHNOLOGIES ET PROCESS D'EMBALLAGE

32, rue de Charette • 28140 TERMINIERS - FRANCE Tél : 33 (0)2 37 18 58 13 - Fax : 33 (0)2 37 32 11 34 ou 33 (0)2 37 32 14 22 www.rassinouxsa.com - Commercial production : clients@rassinouxsa.com Comptabilité : compta.mf@rassinouxsa.com - Qualité : qualite@rassinouxsa.com

RASSINOUX - SA au capital de 1 372 754 - SIRET 353 267 446 00014 - APE 284B - FR 41 353 267 446 - RCS 353 267 446 Chartres








ATECMAA PACKAGING



Automatic cycle stretch wrapping machine

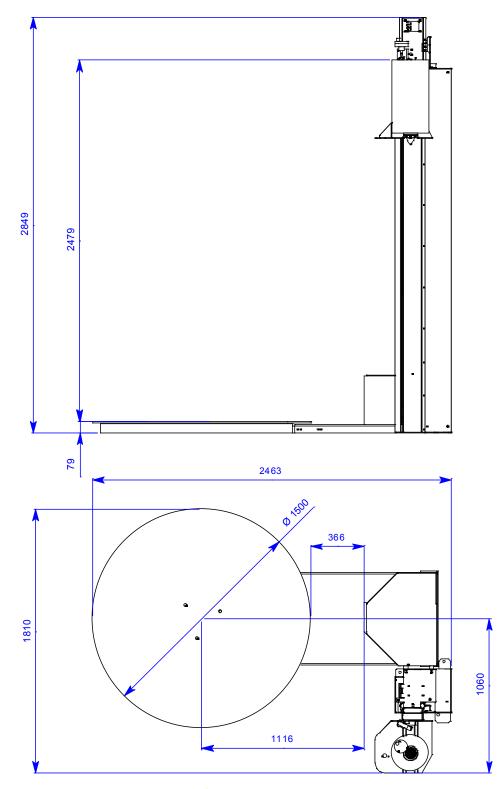

TECHNOLOGIES ET PROCESS D'EMBALLAGE

32, rue de Charette • 28140 TERMINIERS - FRANCE

Tél : 33 (0)2 37 18 58 13 - Fax : 33 (0)2 37 32 11 34 ou 33 (0)2 37 32 14 22 www.rassinouxsa.com - Commercial production : clients@rassinouxsa.com Comptabilité : compta.mf@rassinouxsa.com - Qualité : qualite@rassinouxsa.com

RASSINOUX - SA au capital de 1 372 754 € - SIRET 353 267 446 00014 - APE 284B - FR 41 353 267 446 - RCS 353 267 446 Chartres